

1/6
FIG. 1


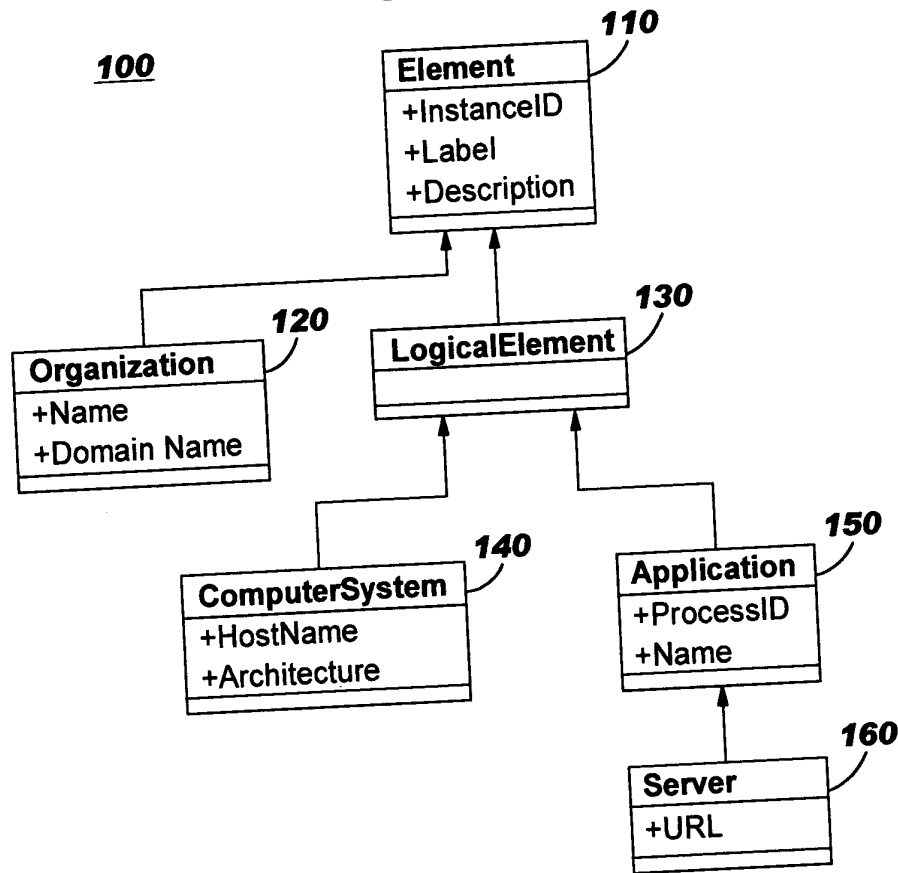


FIG. 2

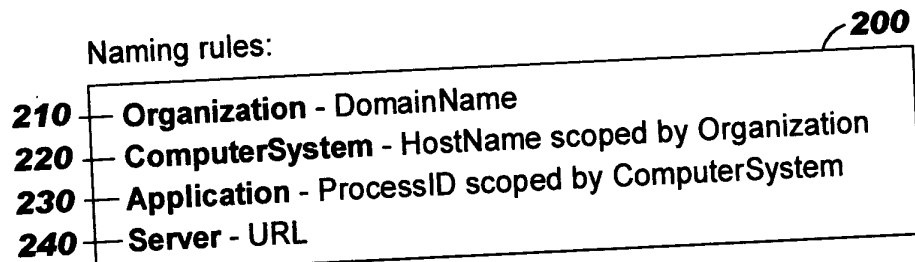

2/6

FIG. 3A

300
Name = IBM
DomainName = ibm.com

FIG. 3B

350
Organization(DomainName="ibm.com")

FIG. 4A

400
HostName = ExampleHost
Architecture = pSeries

FIG. 4B

450
Organization(DomainName="ibm.com"), ComputerSystem(HostName="ExampleHost")

3/6

FIG. 5A

500
Name = EMACS
ProcessID = 16325

FIG. 5B

550
Organization(DomainName="ibm.com"), ComputerSystem(HostName="ExampleHost"),
Application(ProcessID="16325")


FIG. 6A

600
Name = Apache HTTP Server
610 — URL = http://example.ibm.com:8080

FIG. 6B

650
Server(URL=http://example.ibm.com:8080)

4/6
FIG. 7

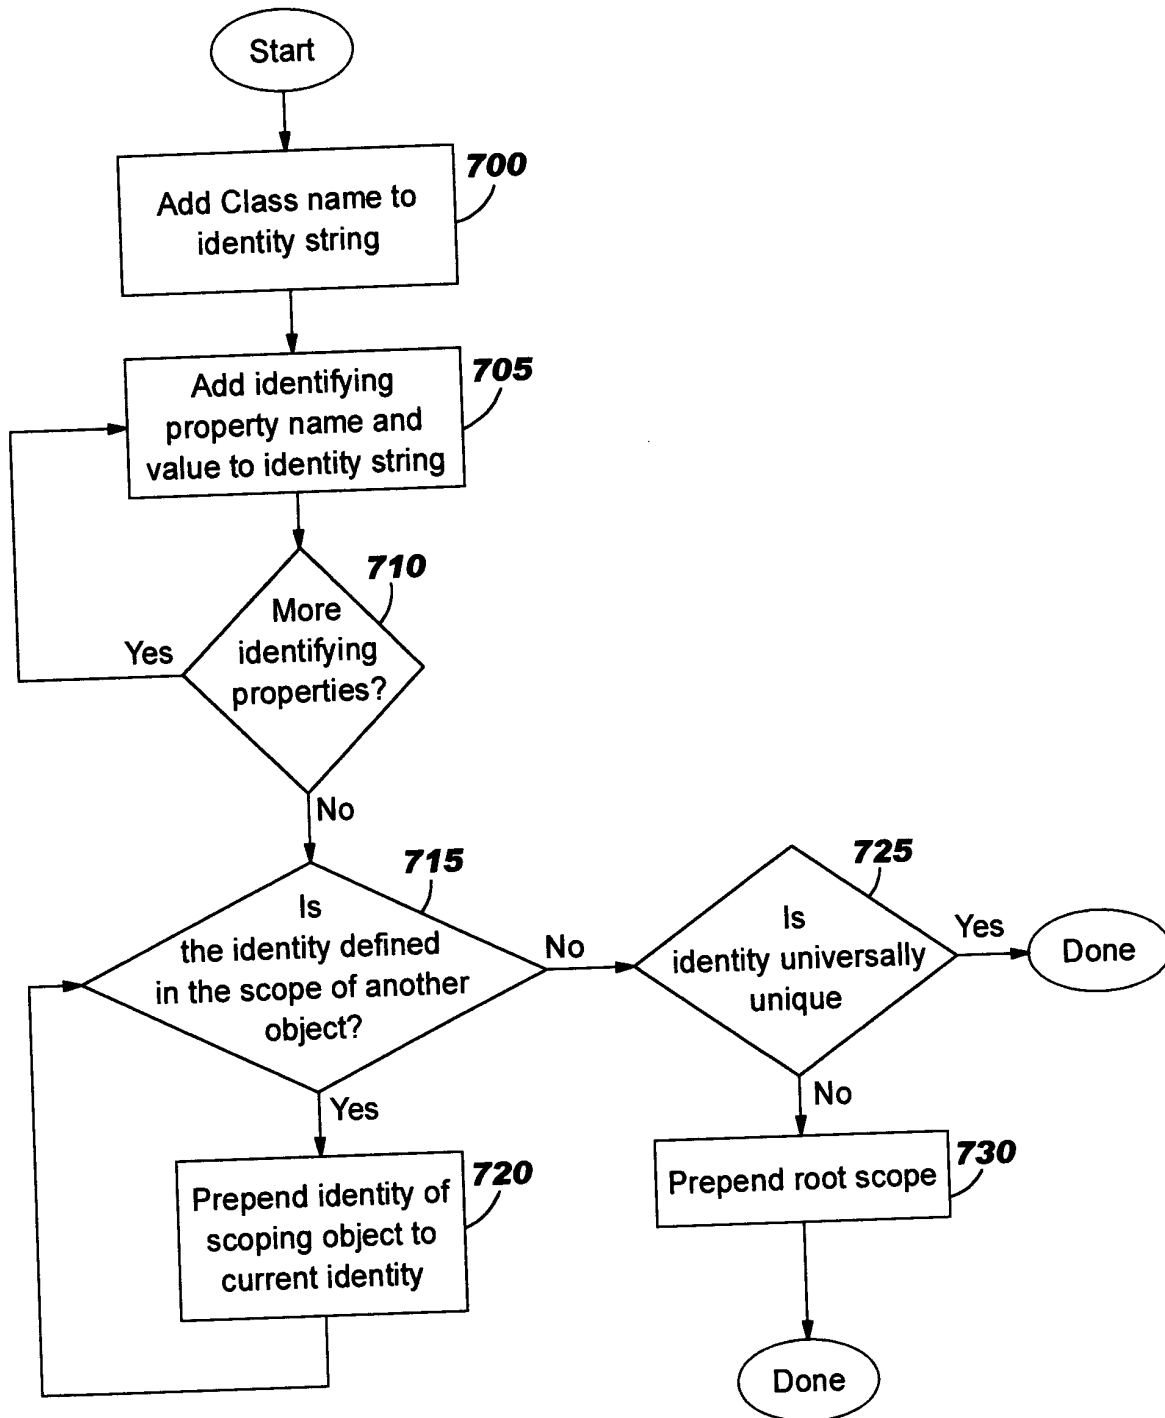

5/6
FIG. 8

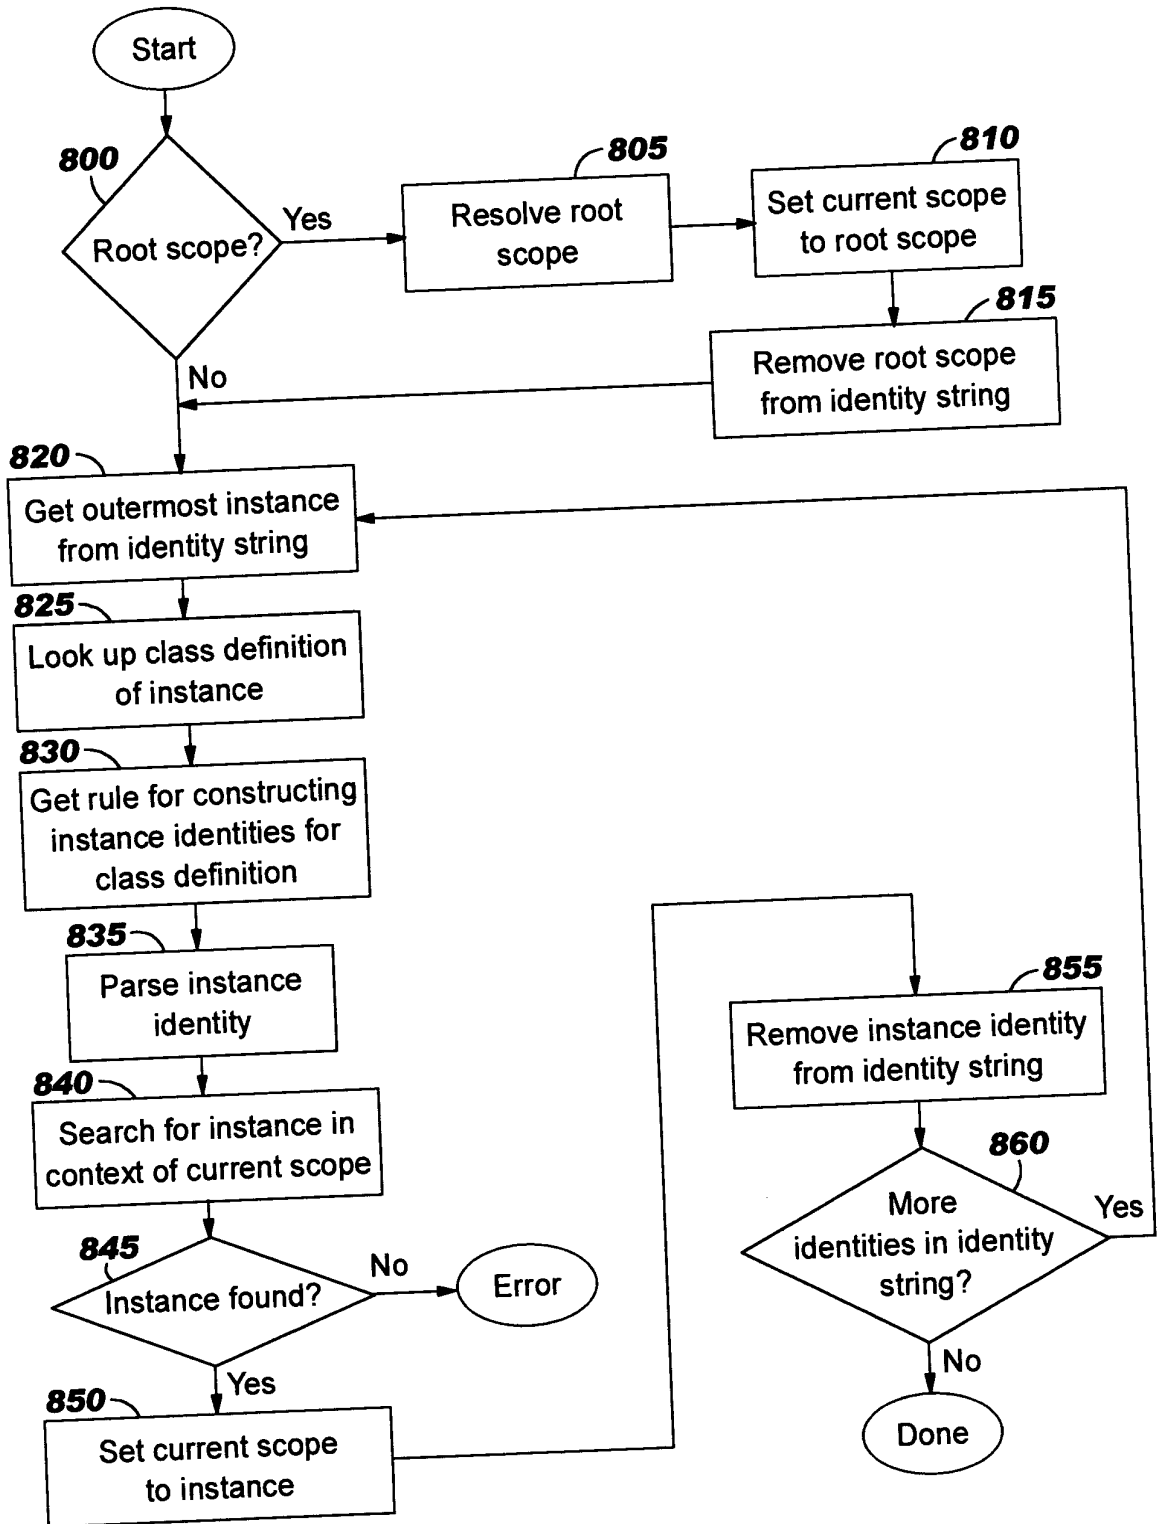


FIG. 9

900

```

<?xml version="1.0" ?>

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema">

<!-- ***** ^
<!-- The root element defines a naming rule. ^
<!-- ***** ^

<xsd:element name="NamingRule" minOccurs="0">~910

  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="Key" maxOccurs="unbounded">~920
      <xsd:complexType>
        <xsd:attribute name="Name" type="xsd:QName" use="required"/>~930
      </xsd:complexType>
    </xsd:element>
  </xsd:sequence>
  <xsd:attribute name="ScopingEntity" type="xsd:QName" use="optional"/>~940
</xsd:complexType>
</xsd:element>
</xsd:schema>

```